



TYROLL CS



Rescue Seat according EN 1498-B with integrated half spine board.

The TYROMONT rescue system TYROLL CS was developed and engineered for the professional rescue of a patient from confined spaces.


The device enables the rescuer to pack the patient efficiently and securely for a vertical lift, horizontal carry out or drag extraction from all confined spaces like hub or wind-turbine nacelle of wind energy plants, shafts and chambers.

Characteristics:

Thanks to the integrated carbon spine board and the additional drag runners on the underside, the patient could be dragged smoothly and gently in confined spaces operations and especially in overcoming sharp edges.

The integrated rescue seat allows a comfortable transport of the patient and in case of overcoming bottlenecks the system could be vertically lifted with the special suspension (optional, #93540).

A variety of handles and straps allow the patient to be transported by carrying horizontally.

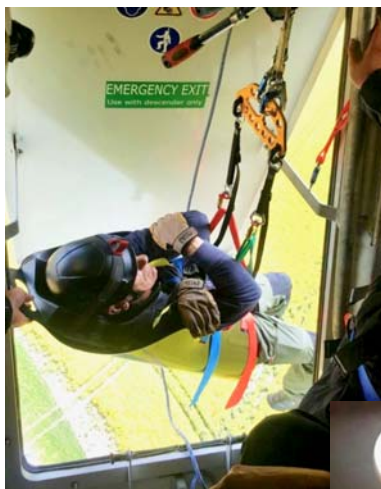

Art. No.	93265
Dimensions	Height: 107 cm Circumference: 115 cm Diameter: 32 cm
Weight	7,1 kg
Basic System	TYRAH AR Rescue Seat from TYROMONT according EN 1498-B, max. work load 150kg, including carbon extraction board
Accessoires	Transport Bag for TYROLL CS (93398) Suspension for TYROLL CS (93540) <i>consisting of:</i> <ul style="list-style-type: none"> • PAW L (Petzl) according EN795-B, breaking load 36kN • Matchsling (Edelrid) according EN354 / EN566 / EN 795-B, breaking load 22kN • Micro Inox carabiner (AustriAlpin) according EN12275, breaking load 34kN • Conecto (Edelrid) according EN354, breaking load 15kN